

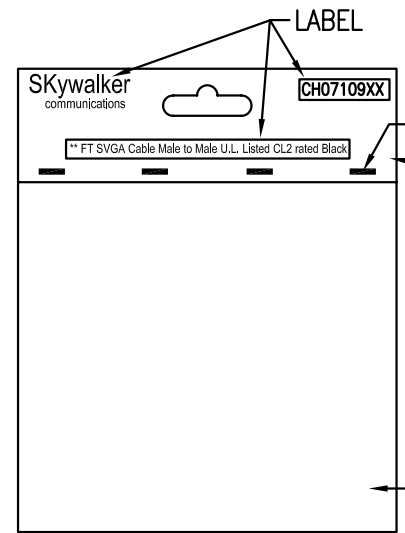


UL NO.: E245579

- NOTES:
1. MATERIAL
 - 1.1 CABLE(30#): [(7/0.1BC +FPE +28/0.12CCA +PVC)*3 +(7/0.1BC+PVC)*7C+AL + 7/0.1BC+ B(96/0.12ALM)+ PVC(BLACK)].
 - 1.2 HIGH DENSITY D-SUB 15 MALE: BLUE INSULATION, GOLD FLASH CONTACTS, GOLD PLATED SHELL.
 - 1.3 FERRITE CORE: $\phi 14.2 \times \phi 9.5 \times 28.5$ mm.
 - 1.4 ALL HOOD: BLACK PVC.
 - 1.5 THUMB SCREW TO BE MOLDED BLACK PVC.
 - 1.6 ALL COMPONENTS ARE RoHS COMPLIANT.
 2. ELECTRICAL
 - 2.1 100% OPEN AND SHORT TEST
 - 2.2 HI-POT: DC200V/0.01S
 3. PACKING
 - 3.1 EACH CABLE IN A PE POLYBAG.
 - 3.2 P/N LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON PE POLY-BAG.

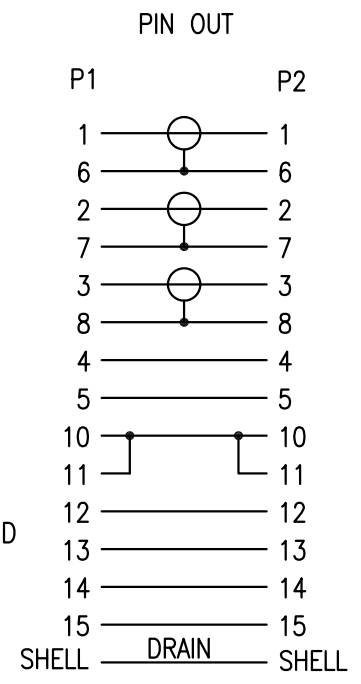

PACKING

DRAWING APPROVED _____		DATE: _____	
SAMPLE APPROVED PER _____		DATE: _____	
DRAWING SPECIFICATIONS _____			
	mm	TITLE HDB15 M/M, WITH FERRITE CORE	
SCALE	NONE	CUS. NAME	
SHEET	1/1	CUS. P/N CH0710920	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		P/N	
.X ±	.XX ±	DRAWING NO. KS0805013-E-3	
.XXX ±	ANGLES ±	ENG.	DATE
REV. A/0	CUS. REV	CHECKED	DATE
		APPROVED	DATE

A/0	NEW ISSUE	2008-09-9
REV.	MODIFY DESCRIPTION	DATE