

**ELECTRICAL SPECIFICATION**

5-2300MHz Satellite 4 Way Splitter

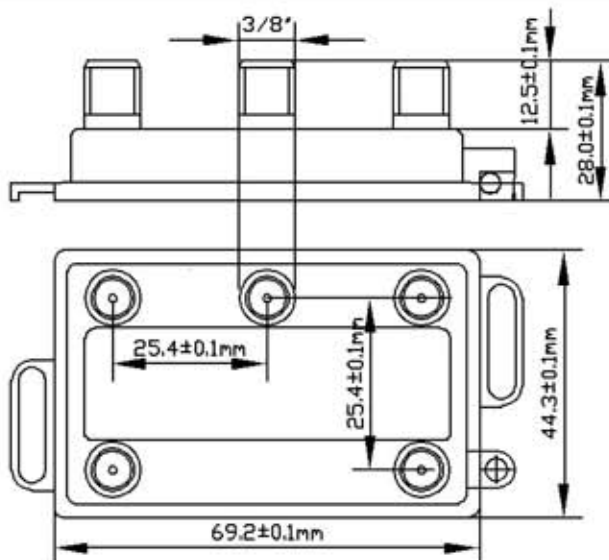
Model:

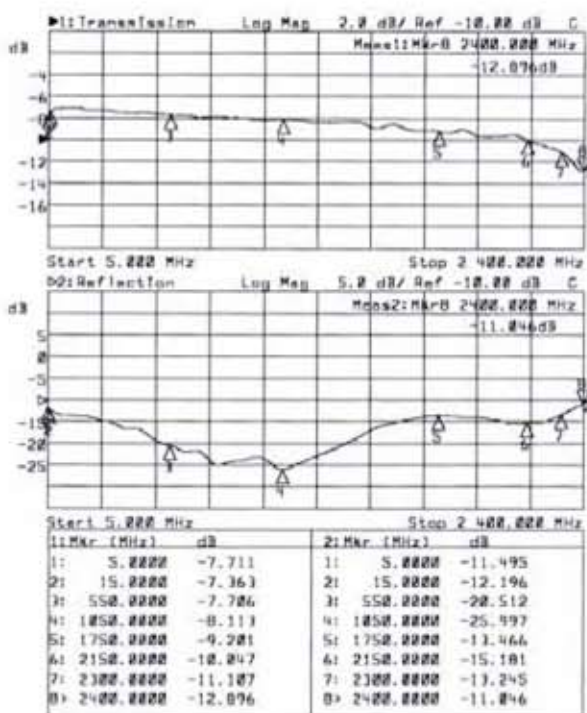
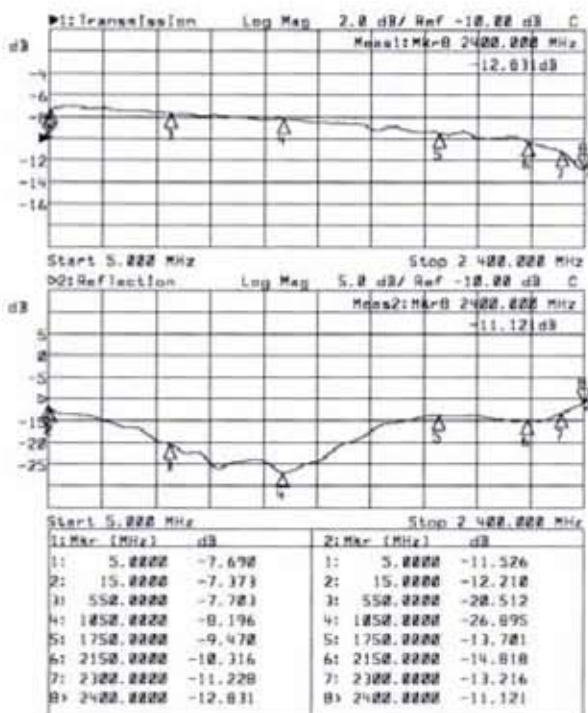
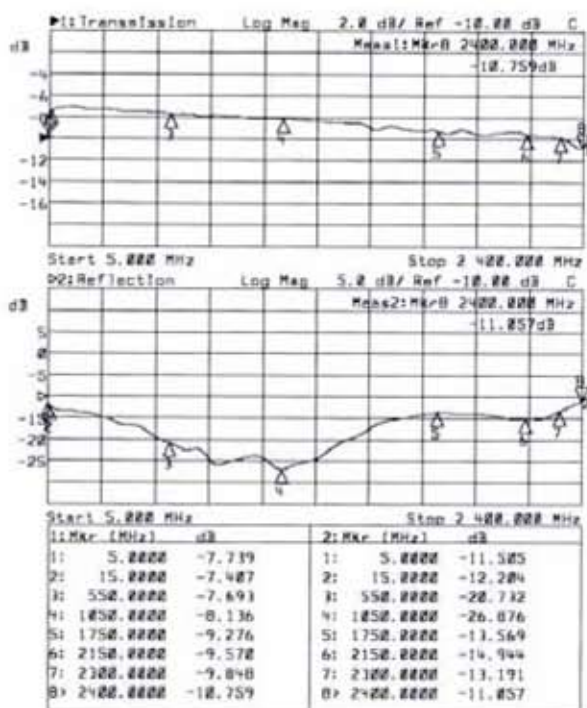
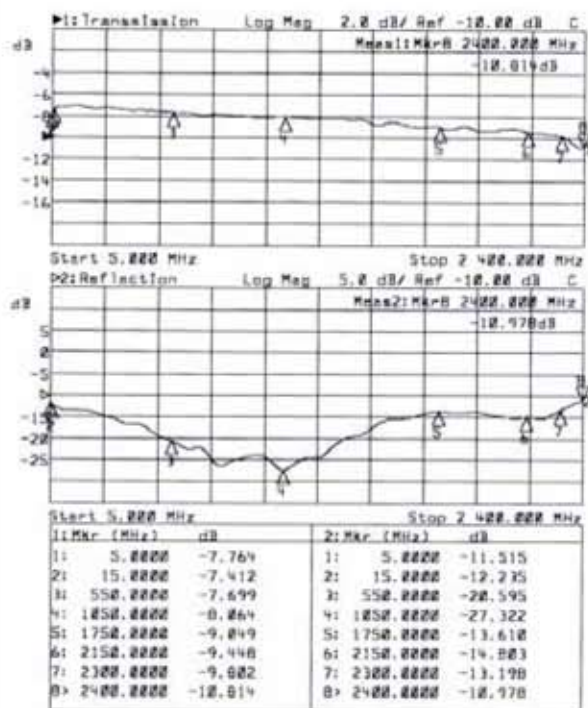
Date: 2009/5/16

	Frequency Range (MHz)	TYPICAL(dB)	Q.C LIMIT (dB)
INSERTION LOSS (MAX)	5-15	≤7.5	≤7.8
	15-550	≤8.0	≤8.1
	550-1050	≤8.5	≤8.7
	1050-1750	≤9.2	≤9.5
	1750-2150	≤10.0	≤10.5
	2150-2300	≤11.2	≤12.0
ISOLATION (MIN.)	5-15	≥21	≥20
	15-550	≥23	≥20
	550-1050	≥23	≥20
	1050-1750	≥22	≥20
	1750-2150	≥21	≥20
	2150-2300	≥21	≥20
RETURN LOSS IN (MIN.)	5-15	≥12	≥11
	15-550	≥12	≥10
	550-1050	≥15	≥10
	1050-1750	≥15	≥10
	1750-2150	≥12	≥10
	2150-2300	≥12	≥10
RETURN LOSS OUT (MIN.)	5-15	≥10	≥9.0
	15-550	≥13	≥10
	550-1050	≥12	≥10
	1050-1750	≥11	≥10
	1750-2150	≥11	≥10
	2150-2300	≥11	≥10

DC PASS

ONE PORT &amp; ALL PORT

 MEASUREMENT  
(MM)


**ELECTRICAL SPECIFICATION**
**Model**
**Date:**
**2009/5/16**
**Description**
**5-2300MHz Satellite 4 Way Splitter, Tin Plating,,**
**One & All port power pass. RFI:  $\geq 130$ dB, Temperature Range: -40 ~ 60 °**


**ELECTRICAL SPECIFICATION**
**Model**
**Date:**
**2009/5/16**
**Description**
**5-2300MHz Satellite 4 Way Splitter, Tin Plating,,**
**One & All port power pass. RFI:  $\geq 130$ dB, Temperature Range: -40 ~ 60 °**
